DPL3 100

PLASTIC DIFFUSERS

Features

- For supply and exhaust ventilation and air conditioning systems.
- For synchronous ventilation and backlighting of premises.
- Designed for a wall or suspended ceiling mounting.
- The best solution for use in exhaust systems of premises with high humidity, such as bathrooms and WCs.
- Made of high quality plastic.
- The diffuser is supplied with a LED lamp with a power consumption of 5 W and light temperature of 6000 K (day white). Other lights are available. Easily mountable with a mounting flange.
- Special aerodynamic shape ensures uniform air distribution.
- Easy mounting with a mounting flange and screws.
- External removable grille for technical maintenance and cleaning.
- IP rating is IPX4.
- The delivery set includes a 100-240/12 V power unit for LED lamps.
- Safe lamp voltage: 12 V.
- Lamp cap: G5.3.
- Supplied with a terminal box.





Color modifications

Dimensions and mounting

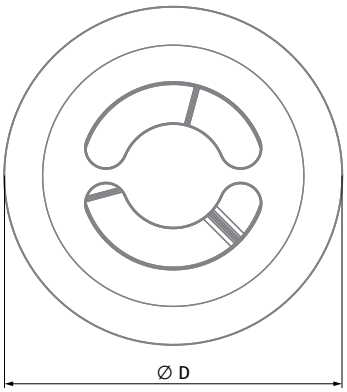

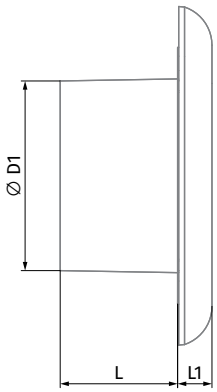

Dimensions [mm]	Ø D	Ø D1	L	L1	Air pass [m²]
DPL3 100	173	97	60	17.6	0.00302

Technical data

Model	Lamp wattage [W]	Light temperature [K]	Power unit	Diffuser supply voltage [V/50 Hz]
DPL3 100 LED5W-6K T	5	6000	Yes	220-240

	Equivalent area, mm²
Supply	5290
Exhaust	5590

