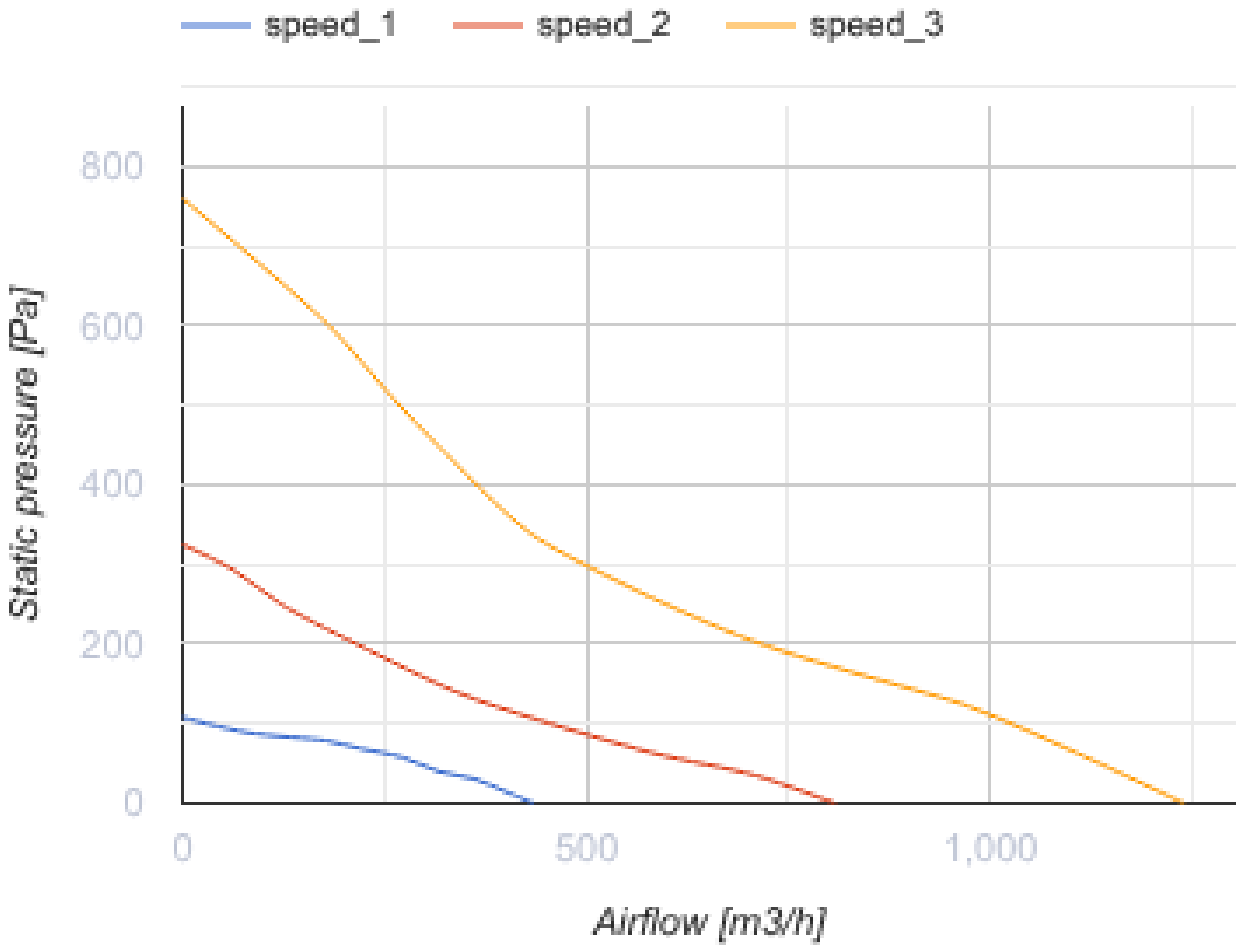



Civic EC LB 1200 S21

The CIVIC EC LB units are designed for single-room ventilation of schools, offices and other public and commercial premises

- Sound pressure level LpA at 1 m: 34
- Heat exchanger type: Counter flow
- Heat exchanger material: Polystyrene
- Bypass: Auto
- BMS protocol: ModBus
- Control: Smartphone, Wired control panel, Wireless control panel
- Casing material: Coated steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- PM2.5 sensor: Optional
- Temperature sensor: Built-in


	Unit of measurement	Civic EC LB 1200 S21
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Maximum airflow	m³/h	1240
Sound pressure level LpA at 1 m	dB(A)	34
Heat recovery efficiency, max	%	96
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	394
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature max	°C	40
Ambient air temperature min	°C	1
Ingress protection rating	-	IP20
Ambient air humidity max	%	60
Ingress protection rating of the drive	-	IP44
Minimum wall thickness	mm	100
Maximum wall thickness	mm	2000


speed_1
speed_2
speed_3
800
600
400
200
0
Static pressure [Pa]
0
500
1,000
Airflow [m3/h]

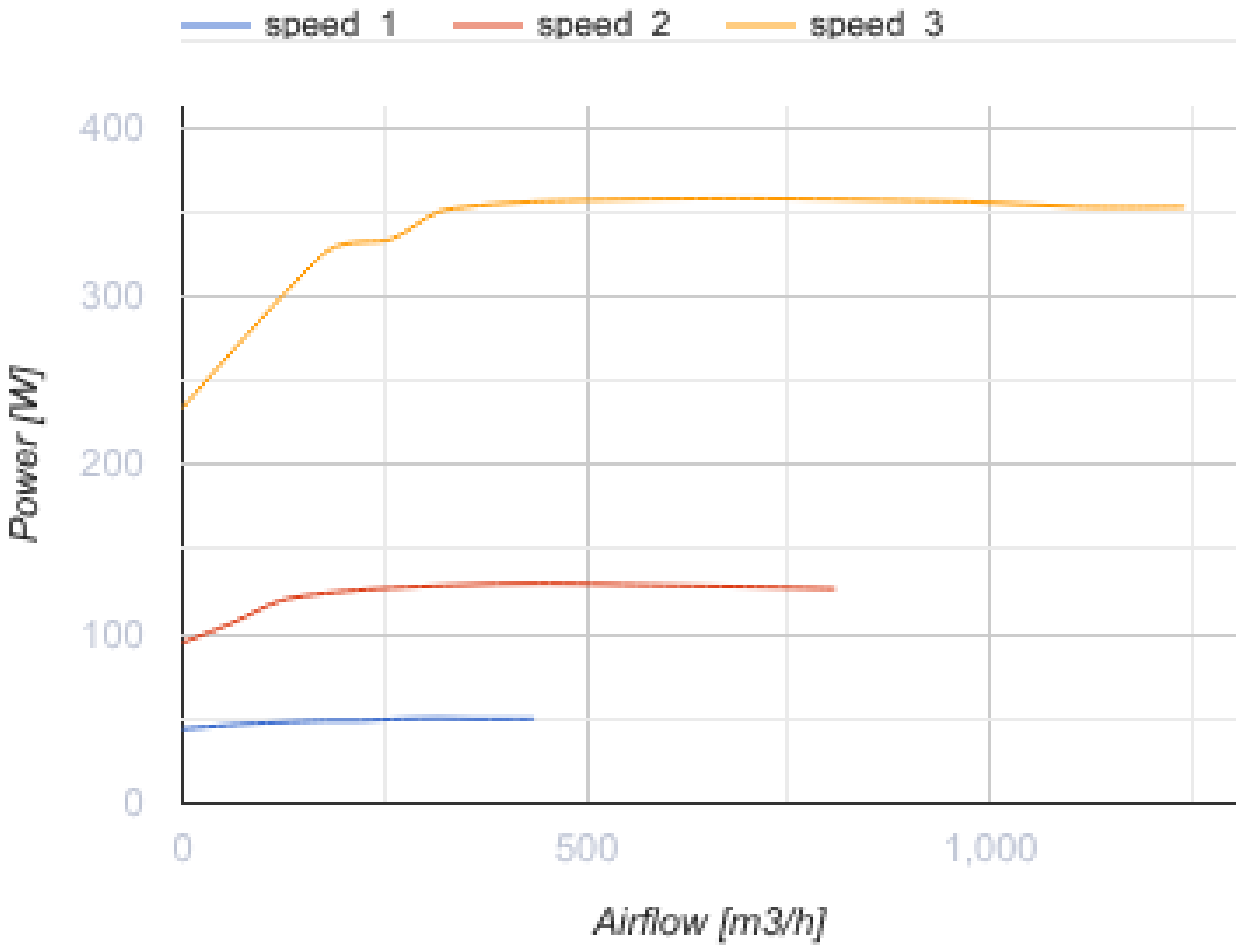

Dimensions

Ø D	H	H1	H2	H3	H4	L	L1	W	W1
397	2000	2106	545	1110	70	535	265	1900	1951

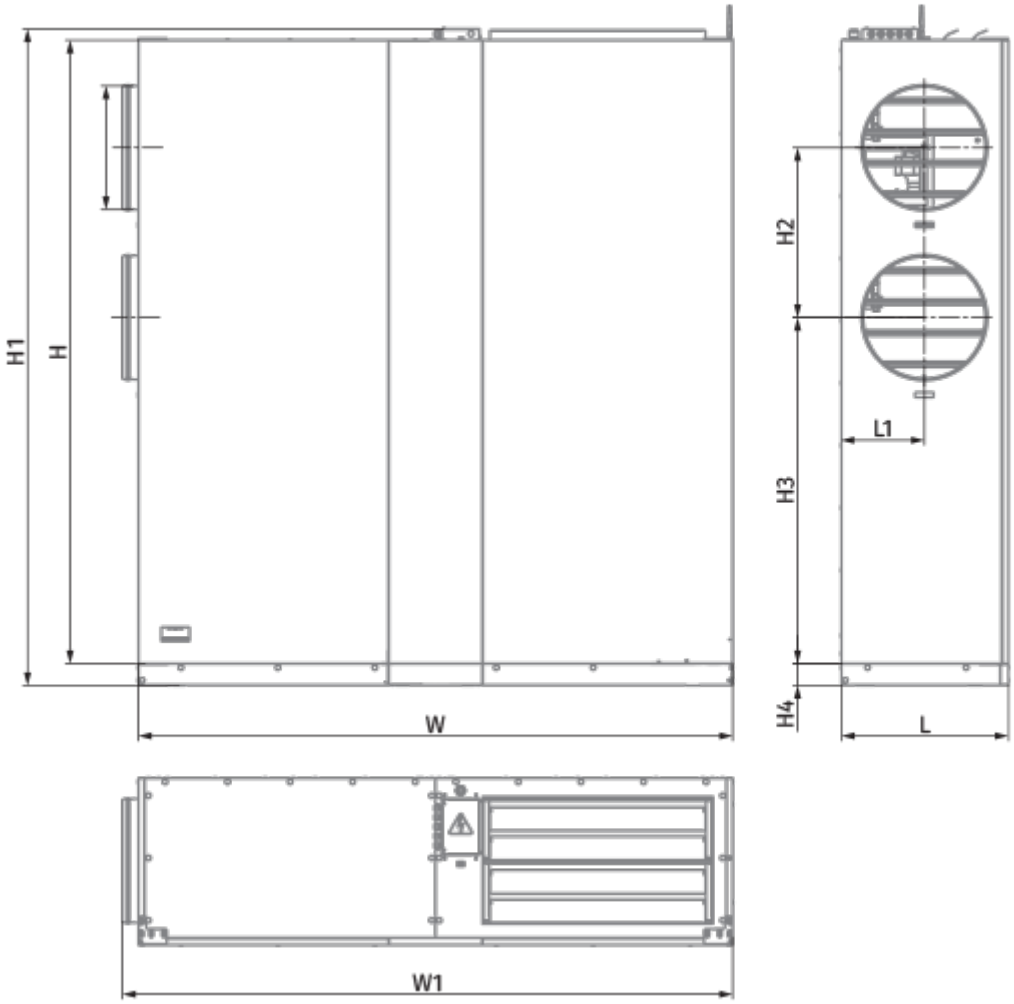

Accessories

Condensation drainage

Name	Photo	Description
SFK 20x32		Hydraulic syphon for condensate drainage
CP-2		Drain pump

Control Panels

Name	Photo	Description
S25		LCD control panel

S22		Control panels
S22 Wi-Fi		Control panels

CO2 sensors

Name	Photo	Description
CD-1		CO2 sensors
CD-2		CO2 sensors

Humidity sensors

Name	Photo	Description
FS2		Humidity sensor

Hoods

Name	Photo	Description
AH Civic 1200 LB chrome		
AH Civic 1200 LB white		

Other accessories

Name	Photo	Description
FP 540x450x48 F7		F7 panel filter

FP 540x450x48 G4		G4 panel filter
FP 450x395x48 G4 PET		G4 filter