


Ducto 125 T

Low noise axial inline fans for exhaust or supply ventilation with superior air flow


- Casing material: Plastic
- Timer: Turn off timer

	Unit of measurement	Ducto 125 T
Maximum supply voltage	V	240
Minimum supply voltage	V	220
Power supply frequency	Hz	50
Maximum airflow	m^3/h	197
Weight	kg	0.75
Ambient air temperature max	°C	40
Ambient air temperature min	°C	1
Ingress protection rating	-	IPX4
Impeller material	-	Plastic

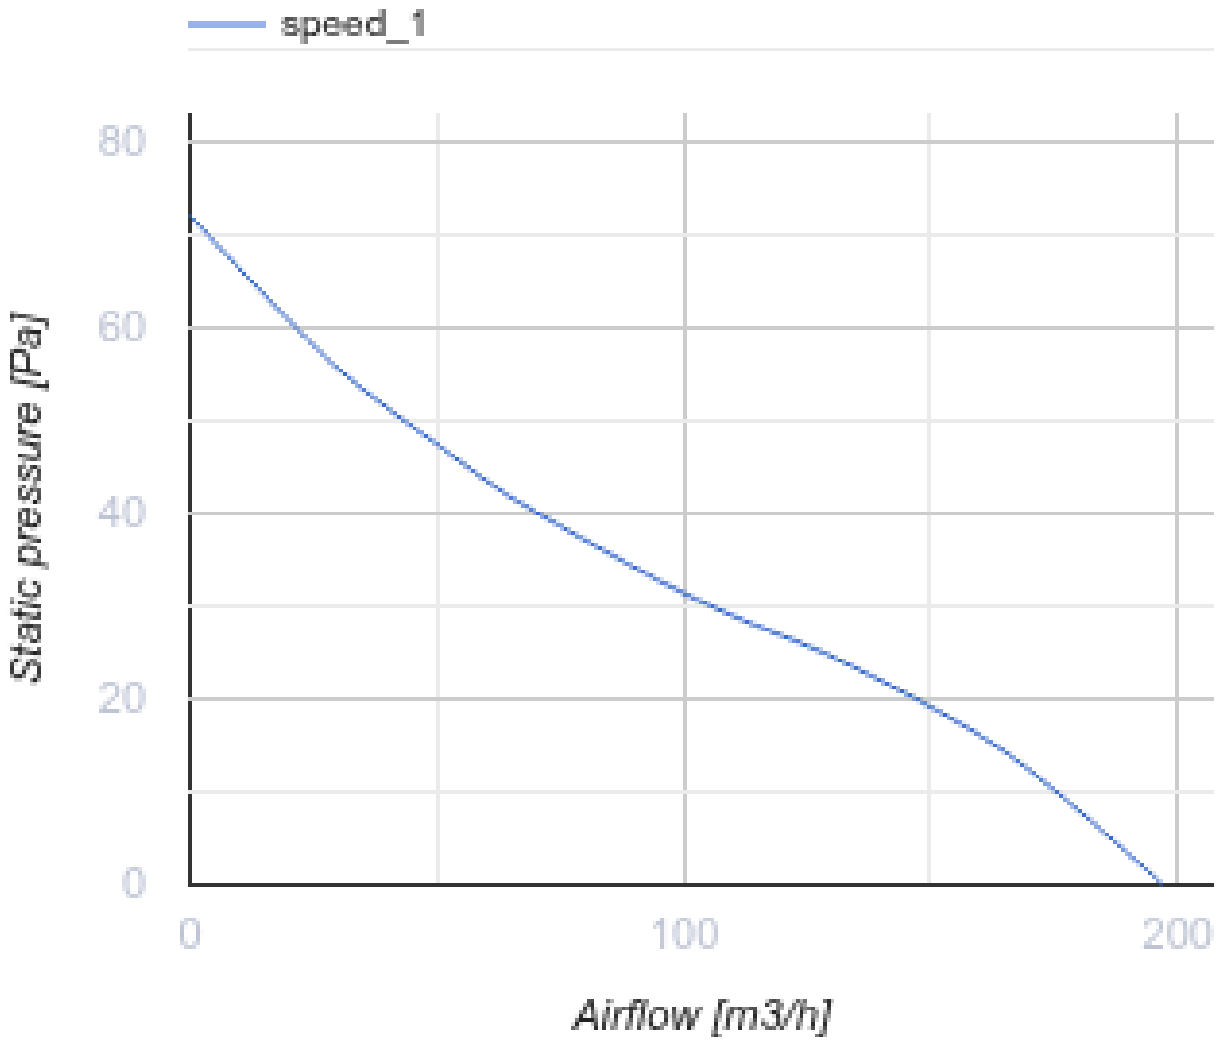

Dimensions

L	ØD
161.5	125

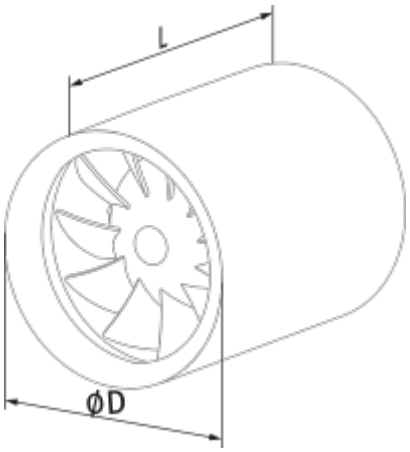
L
ØD

Ecodesign

Trademark	Blauberg					
Model	Ducto 125 T					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-34.9	A	-16.9	E	-6.7	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Single speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	215					
Electric power input (W)	13					
Reference flow rate (m³/s)	0.042					
Specific power input (SPI) (W/(m³/h))	0.06					
Control typology	Clock control					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	53					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	72		72		72	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3667		1874		848	

Accessories

Speed controllers

Name	Photo	Description
CDT E1.8		Thyristor speed controller