


Ducto 150 T

Low noise axial inline fans for exhaust or supply ventilation with superior air flow


- Casing material: Plastic
- Timer: Turn off timer

	Unit of measurement	Ducto 150 T
Phases	-	N/A
Maximum supply voltage	V	240
Minimum supply voltage	V	220
Power supply frequency	Hz	50
Maximum airflow	m^3/h	335
Weight	kg	1.3
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IPX4
Impeller material	-	Plastic

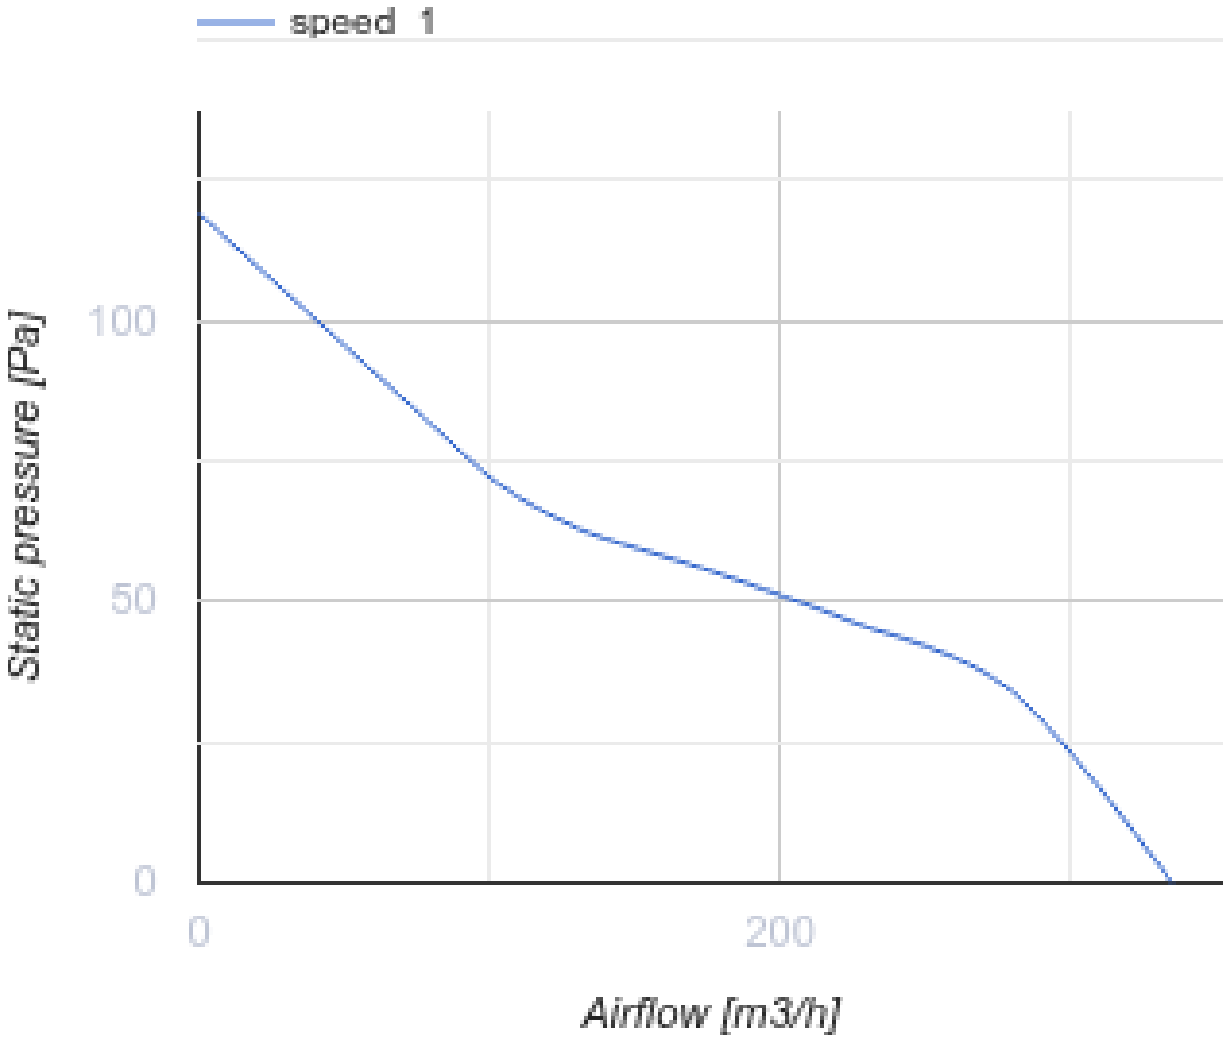

Dimensions

L	ØD
181.5	150

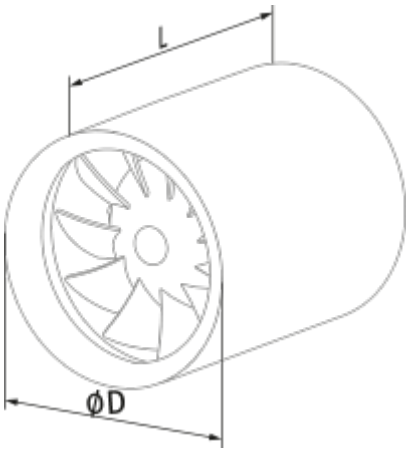
L
ØD

Ecodesign

Trademark	Blauberg					
Model	Ducto 150 T					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-34.7	B, A	-16.8	E	-6.6	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Single speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	340					
Electric power input (W)	22					
Reference flow rate (m³/s)	0.066					
Specific power input (SPI) (W/(m³/h))	0.065					
Control typology	Manual control			Clock control		
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	59					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	77		77		77	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3667		1874		848	

Accessories

Speed controllers

Name	Photo	Description
CDT E1.8		Thyristor speed controller