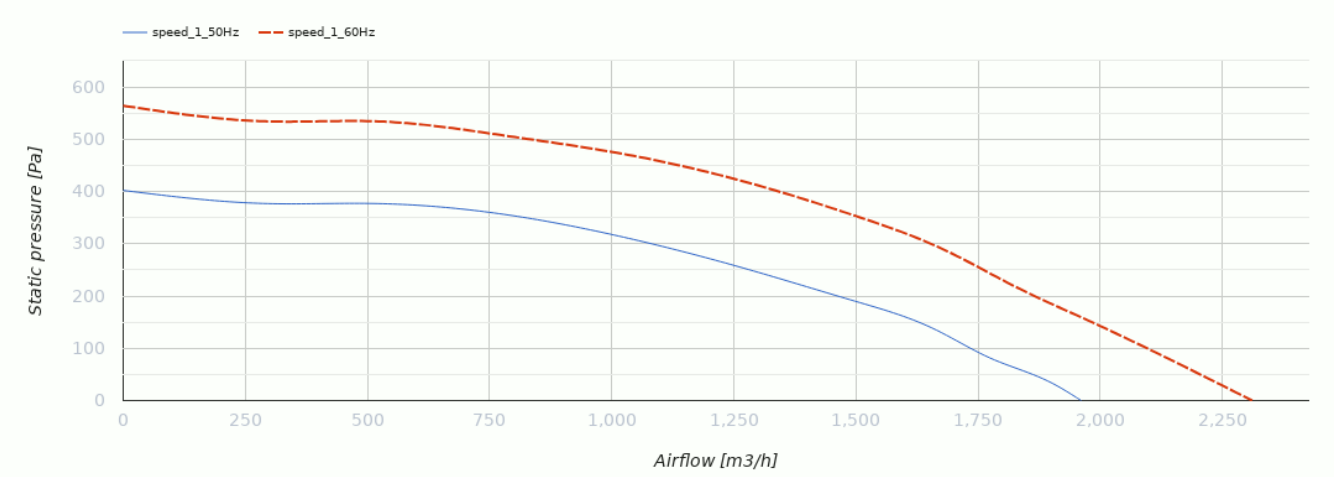


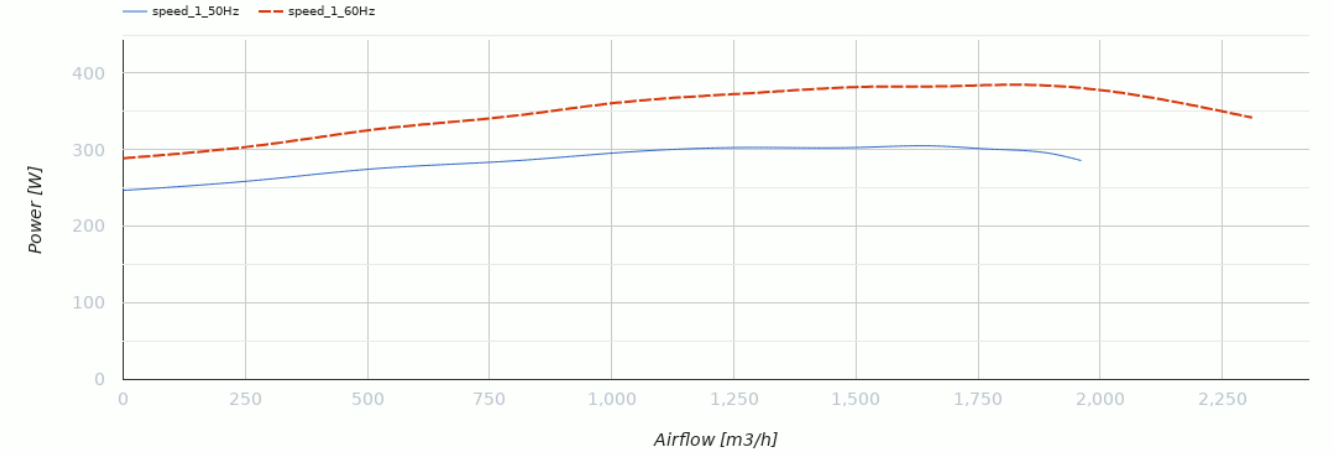
# Iso-K 315 4E

Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C

- Sound-insulated casing
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Galvanized steel

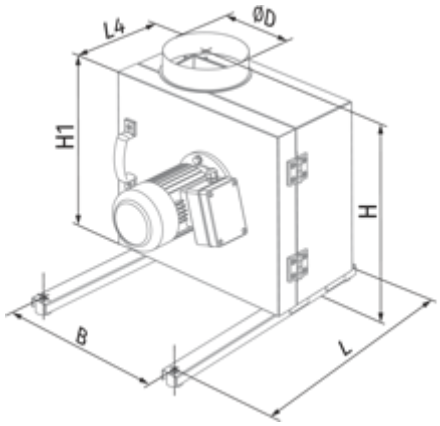
| | Unit of measurement | Iso-K 315 4E |
|---|---|---|
| Phases | - | 1 |
| Maximum supply voltage | V | 230 |
| Minimum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Maximum airflow | $m^3/h$ | 1970 |
| Weight | kg | 53 |
| Transported air temperature (max) | °C | 110 |
| Transported air temperature (min) | °C | -20 |
| Ingress protection rating | - | IP54 |
| Impeller material | - | Galvanized steel |
| Size | mm | 315 |

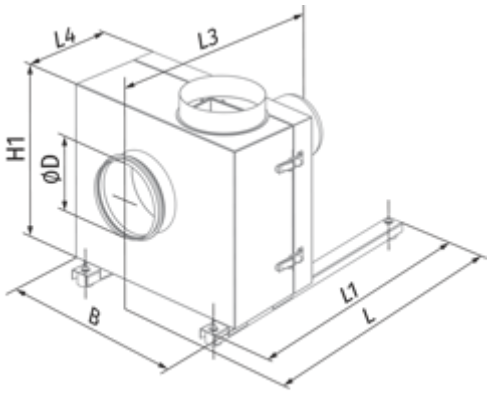



## Dimensions

| Ø D | B | B1 | H | H1 | L | L1 | L2 | L3 | L4 |
|---|---|---|---|---|---|---|---|---|---|
| 315 | 690 | 550 | 708 | 600 | 715 | 700 | 650 | 612 | 327 |




L4
L3
H1
ØD
B
L1
L