

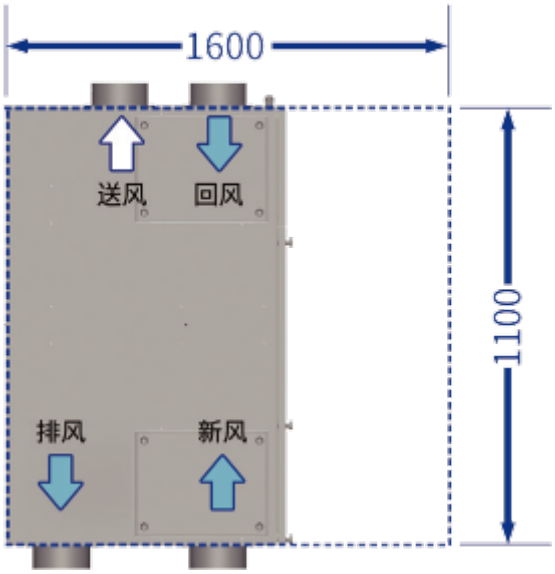
KOMFORT D6B 250 R

Brand new smart air solution for ultra-low energy consumption buildings

- Heat exchanger type: Counter flow
- Control: Wired control panel
- Humidity sensor
- CO2 sensor
- PM2.5 sensor
- Temperature sensor

	Unit of measurement	KOMFORT D6B 250 R
Minimum supply voltage	V	220
Maximum supply voltage	V	220
Power supply frequency	Hz	50
Maximum airflow	m^3/h	250
Heat recovery efficiency, max	%	77
Heat exchanger type	-	Counter flow
Weight	kg	42

Dimensions


1600
送风
回风
1100
排风
新风