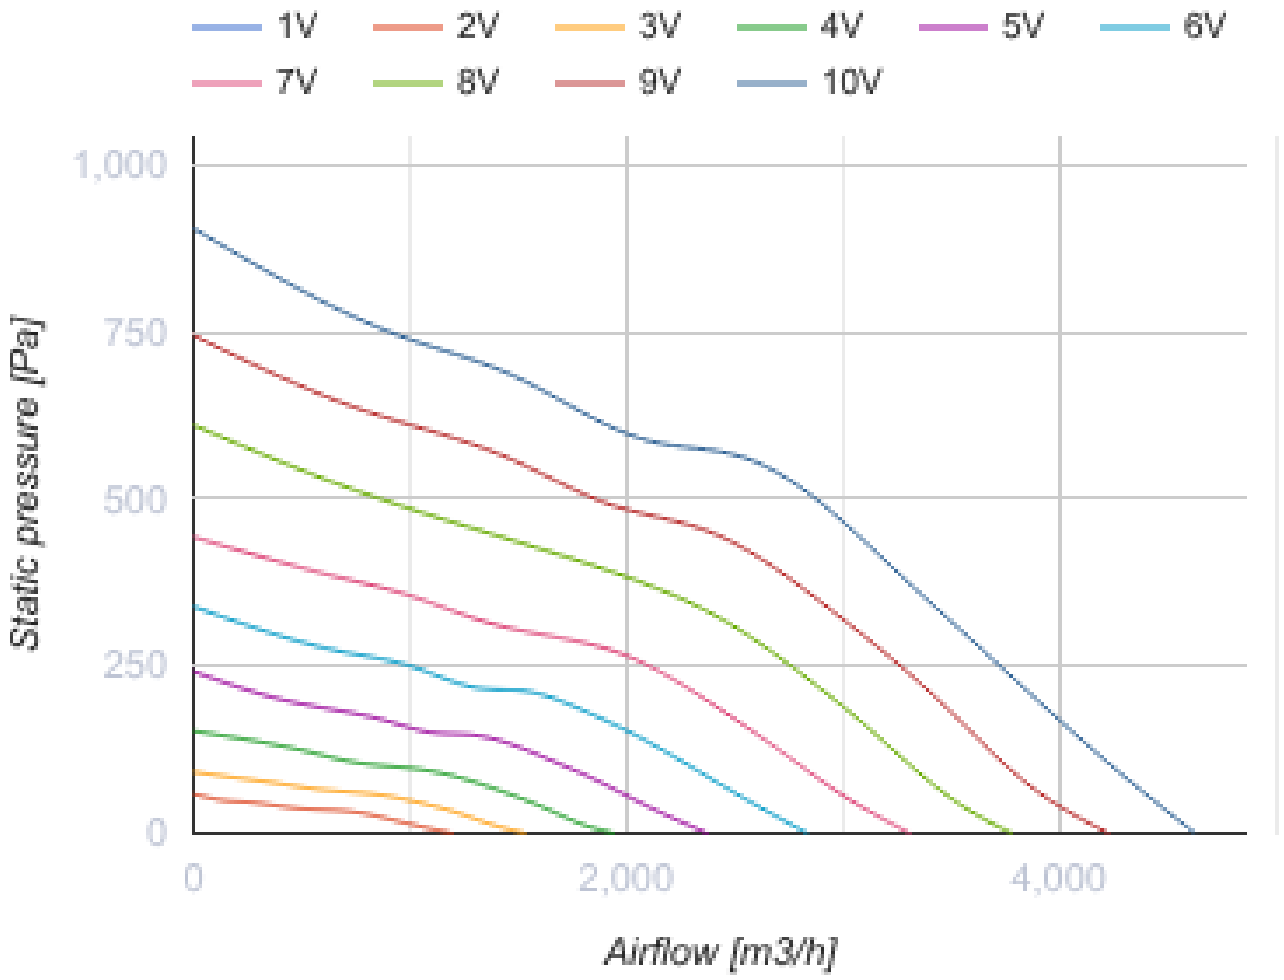


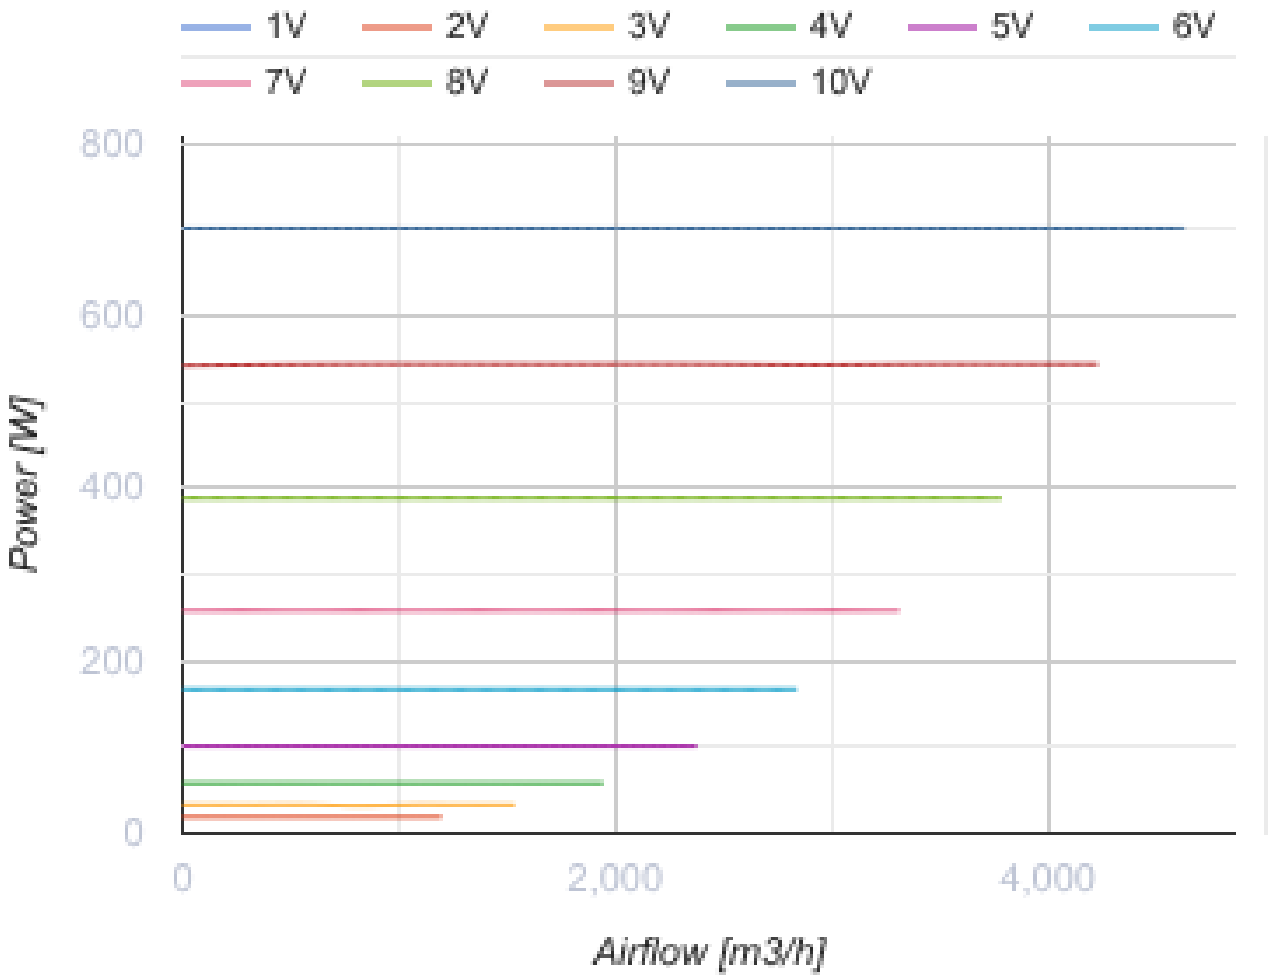
Primo EC 355 max

Mixed-flow inline fans with EC-motors

- Impeller type: Mixed-flow
- Casing material: Polypropylene
- Installation in any position

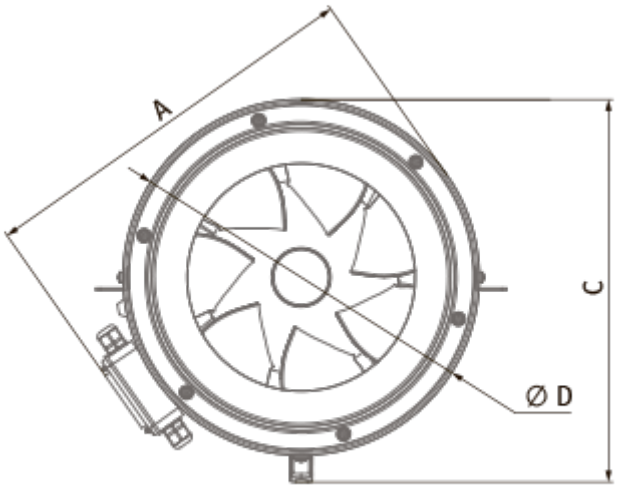
	Unit of measurement	Primo EC 355 max
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Maximum airflow	m³/h	4630
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44
Impeller material	-	Plastic

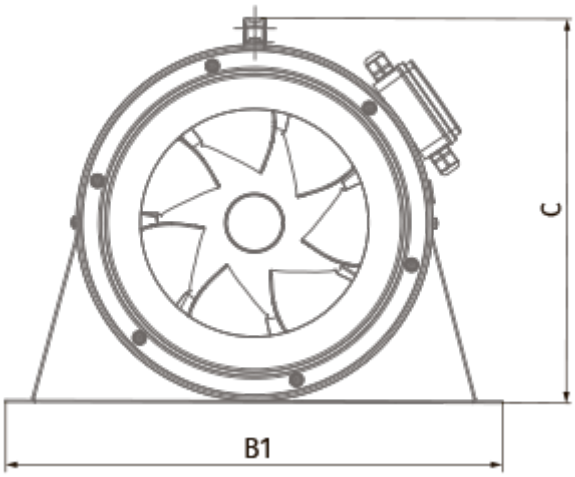

1V
2V
3V
4V
5V
6V
7V
8V
9V
10V
1,000
750
500
250
0
Static pressure [Pa]
0
2,000
4,000
Airflow [m3/h]

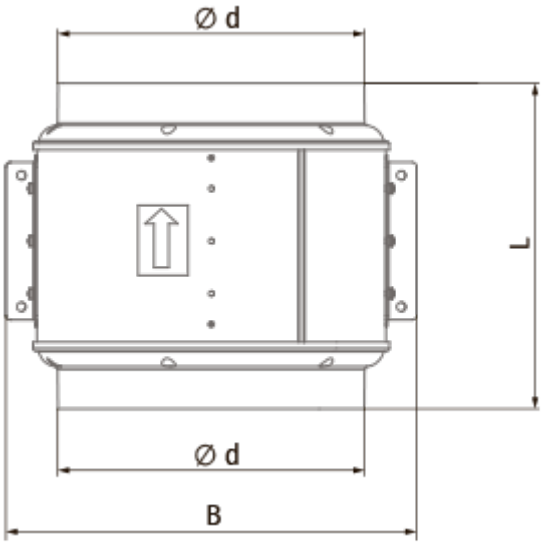


Dimensions

Ø D	Ø d	A	L	B	B1	C	C1
406	350	451	372	468	566	437	439


A
C
Ø D


C
B1


Ø d
L
Ø d
B

Ecodesign

Trademark	Blauberg
Model	Primo EC 355 max
Type of ventilation unit	Unidirectional
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	300
Maximum external leakage rates (%)	2.7
Static efficiency (%)	47.8
Declared typology	NRVU UVU
Effective electric power input (kW)	0.701
Sound power level (dB(A))	80

Accessories

For round ducts

Name	Photo	Description
SD 355/600		Silencers for round ducts
SD 355/900		Silencers for round ducts
SD 355/1200		Silencers for round ducts

For round ducts

Name	Photo	Description
VKA 355		Air dampers for round ducts

EC motors regulators

Name	Photo	Description

CDT E/0-10		Speed control for EC motors