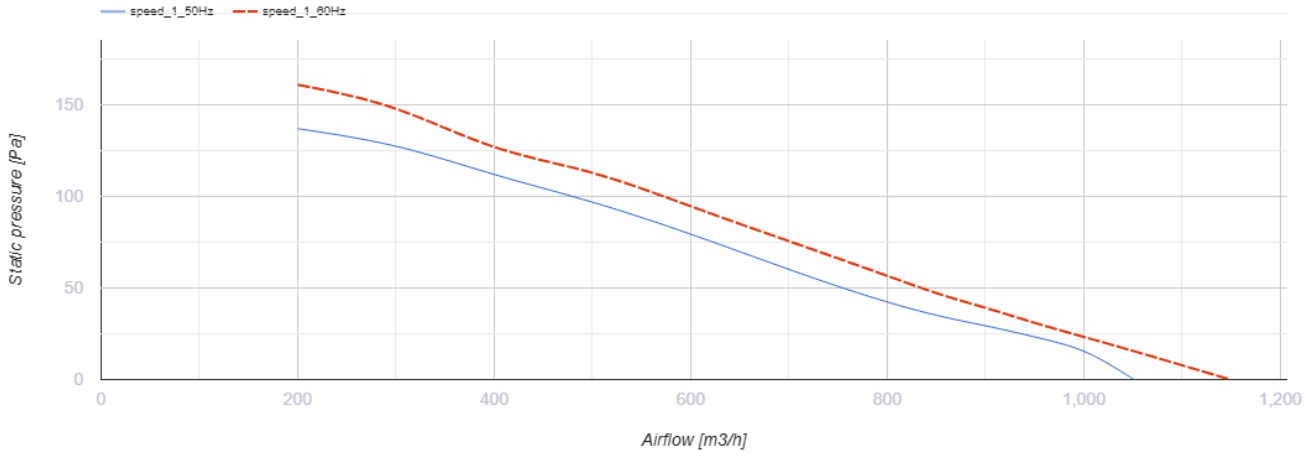


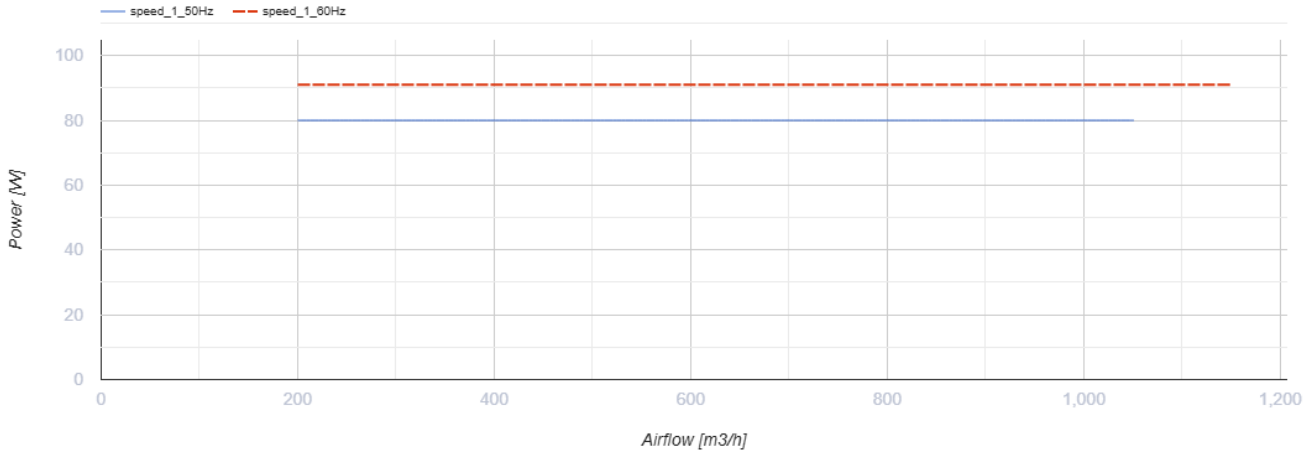
# Tower-A 250 2E

Roof axial fans

- Impeller type: Axial
- Casing material: Coated steel

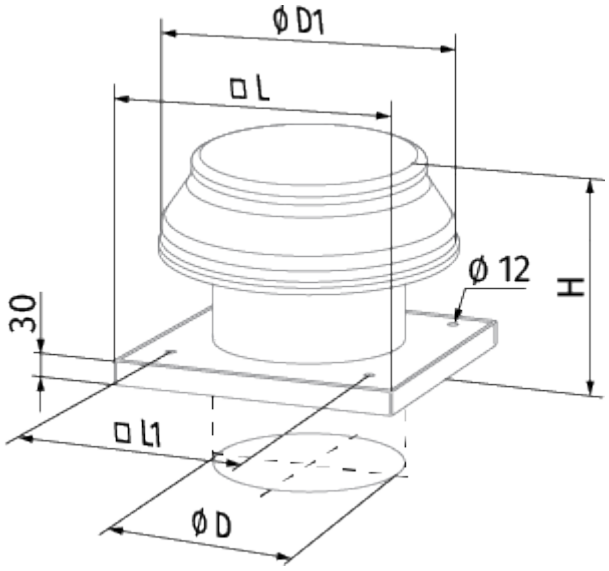
| | Unit of measurement | Tower-A 250 2E |
|---|---|---|
| Phases | - | 1 |
| Maximum supply voltage | V | 240 |
| Minimum supply voltage | V | 220 |
| Power supply frequency | Hz | 50/60 |
| Maximum airflow | $m^3/h$ | 1050 |
| Weight | kg | 7 |
| Transported air temperature (max) | °C | 60 |
| Transported air temperature (min) | °C | -30 |
| Ingress protection rating | - | IP24 |
| Ingress protection rating of the drive | - | IP44 |
| Impeller material | - | Coated steel |
| Size | mm | 250 |




## Dimensions

| ØD | ØD1 | H | L | L1 |
|---|---|---|---|---|
| 262 | 405 | 280 | 425 | 330 |


ØD1
□L
Ø 12
H
30
□L1
ØD

## Ecodesign

| | |
|---|---|
| Trademark | Blauberg |
| Model | Tower-A 250 2E |
| Type of ventilation unit | Unidirectional |
| Type of drive installed | External MSD or VSD |
| Type of heat recovery system | None |
| Nominal external pressure (Pa) | 88 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 14.1 |
| Sound power level (dB(A)) | 80 |
| Effective electric power input (kW) | 0.098 |
| Declared typology | NRVU UVU |

## Accessories

### Transformer speed controllers

| Name | Photo | Description |
|---|---|---|
| CDR5E E3.5 TP |  | Single phase speed controller |
| CDR5E E5.0 TP |  | Single phase speed controller |
| CDR5E E7.5 TP |  | Single phase speed controller |
| CDR5E E1.5 TP |  | Single phase speed controller |