
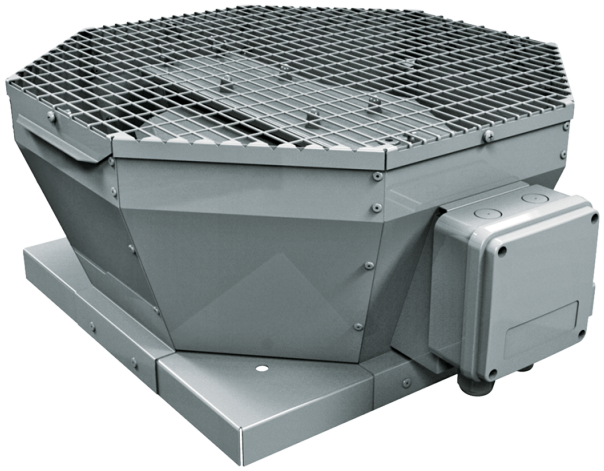



Tower-V 710 6D

Roof centrifugal fans with vertical air discharge

• Impeller type: Centrifugal impeller with backward curved blades
• Casing material: Coated steel


	Unit of measurement	Tower-V 710 6D
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Maximum airflow	m³/h	17010
Weight	kg	114
Transported air temperature (max)	°C	70
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP54
Impeller material	-	Aluminium
Size	mm	710

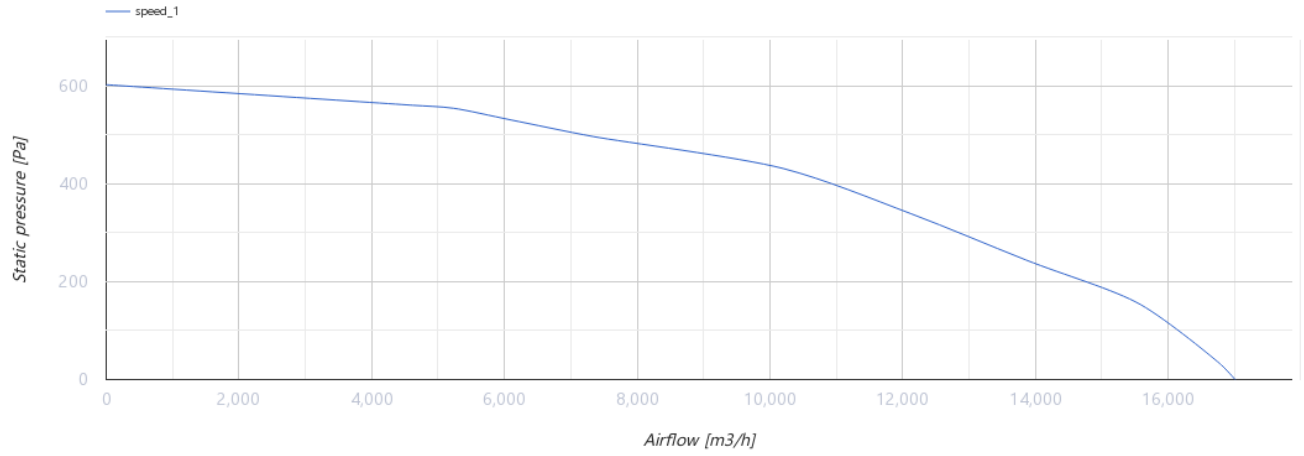

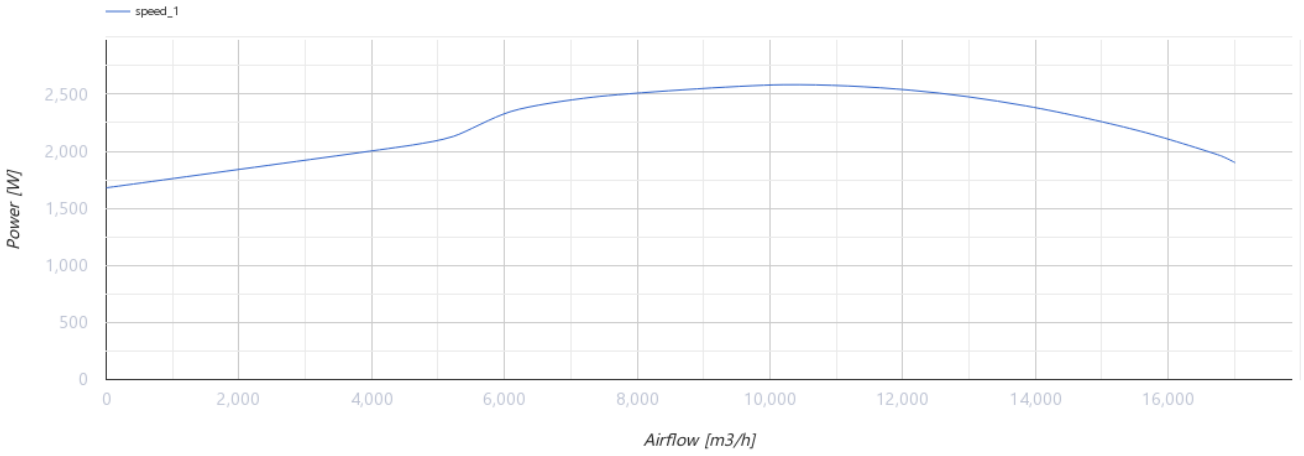

Dimensions

ØD	H	L	L1
674	485	992	939

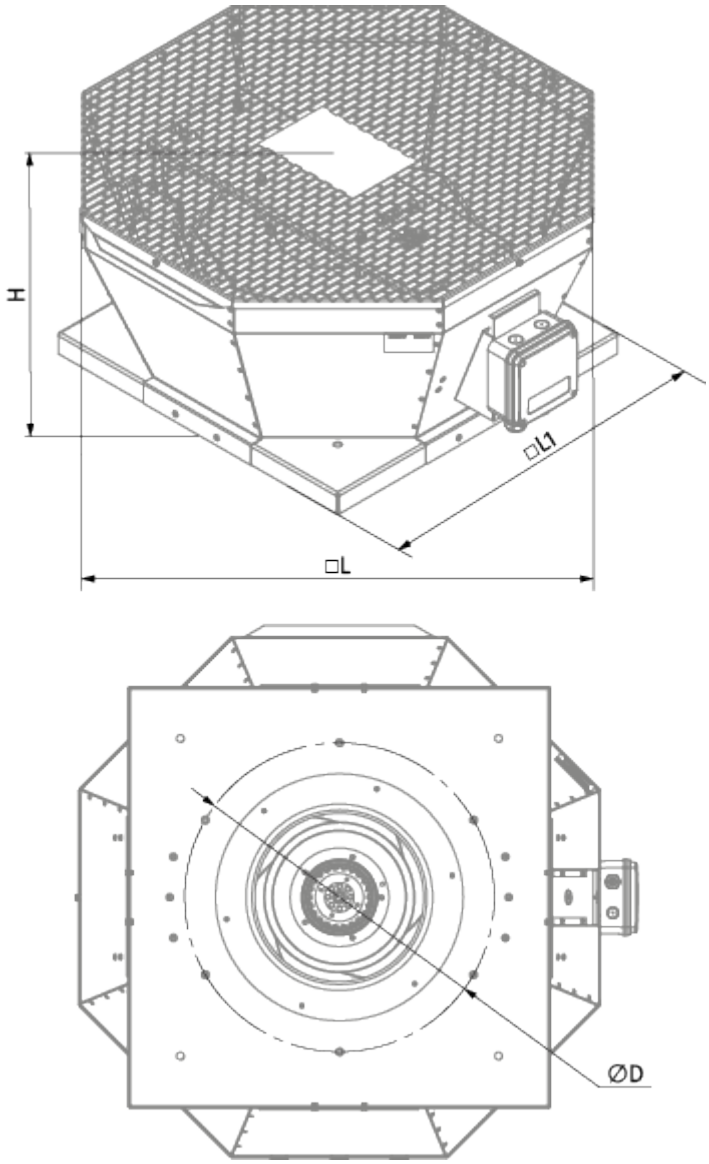

Accessories

Speed controllers

Name	Photo	Description
CDT E1.8		Thyristor speed controller