


# Tubo 150

Inline axial fan for supply and exhaust ventilation


- Casing material: Plastic

| | Unit of measurement | Tubo 150 |
|---|---|---|
| Phases | - | 1 |
| Maximum supply voltage | V | 240 |
| Minimum supply voltage | V | 220 |
| Power supply frequency | Hz | 50 |
| Maximum airflow | m³/h | 295 |
| Weight | kg | 0.8 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IPX4 |
| Impeller material | - | Plastic |

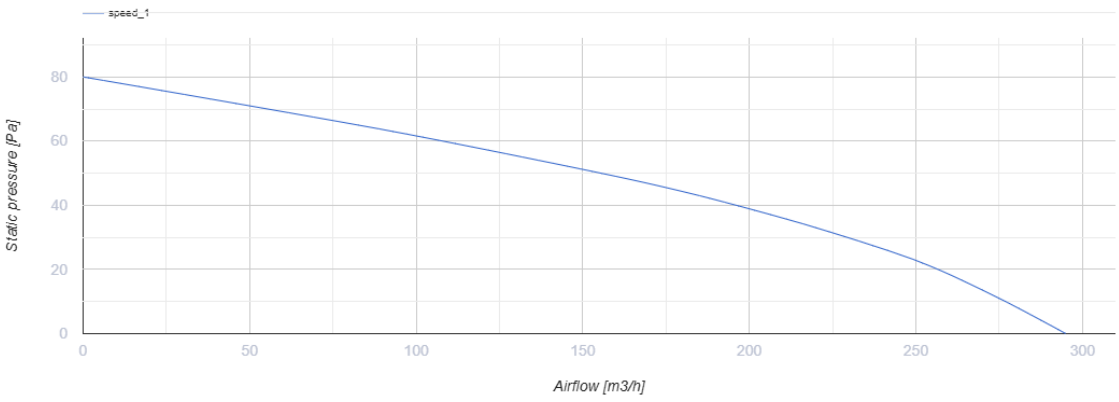

## Dimensions

| c | Ø d |
|---|---|
| 100 | 150 |

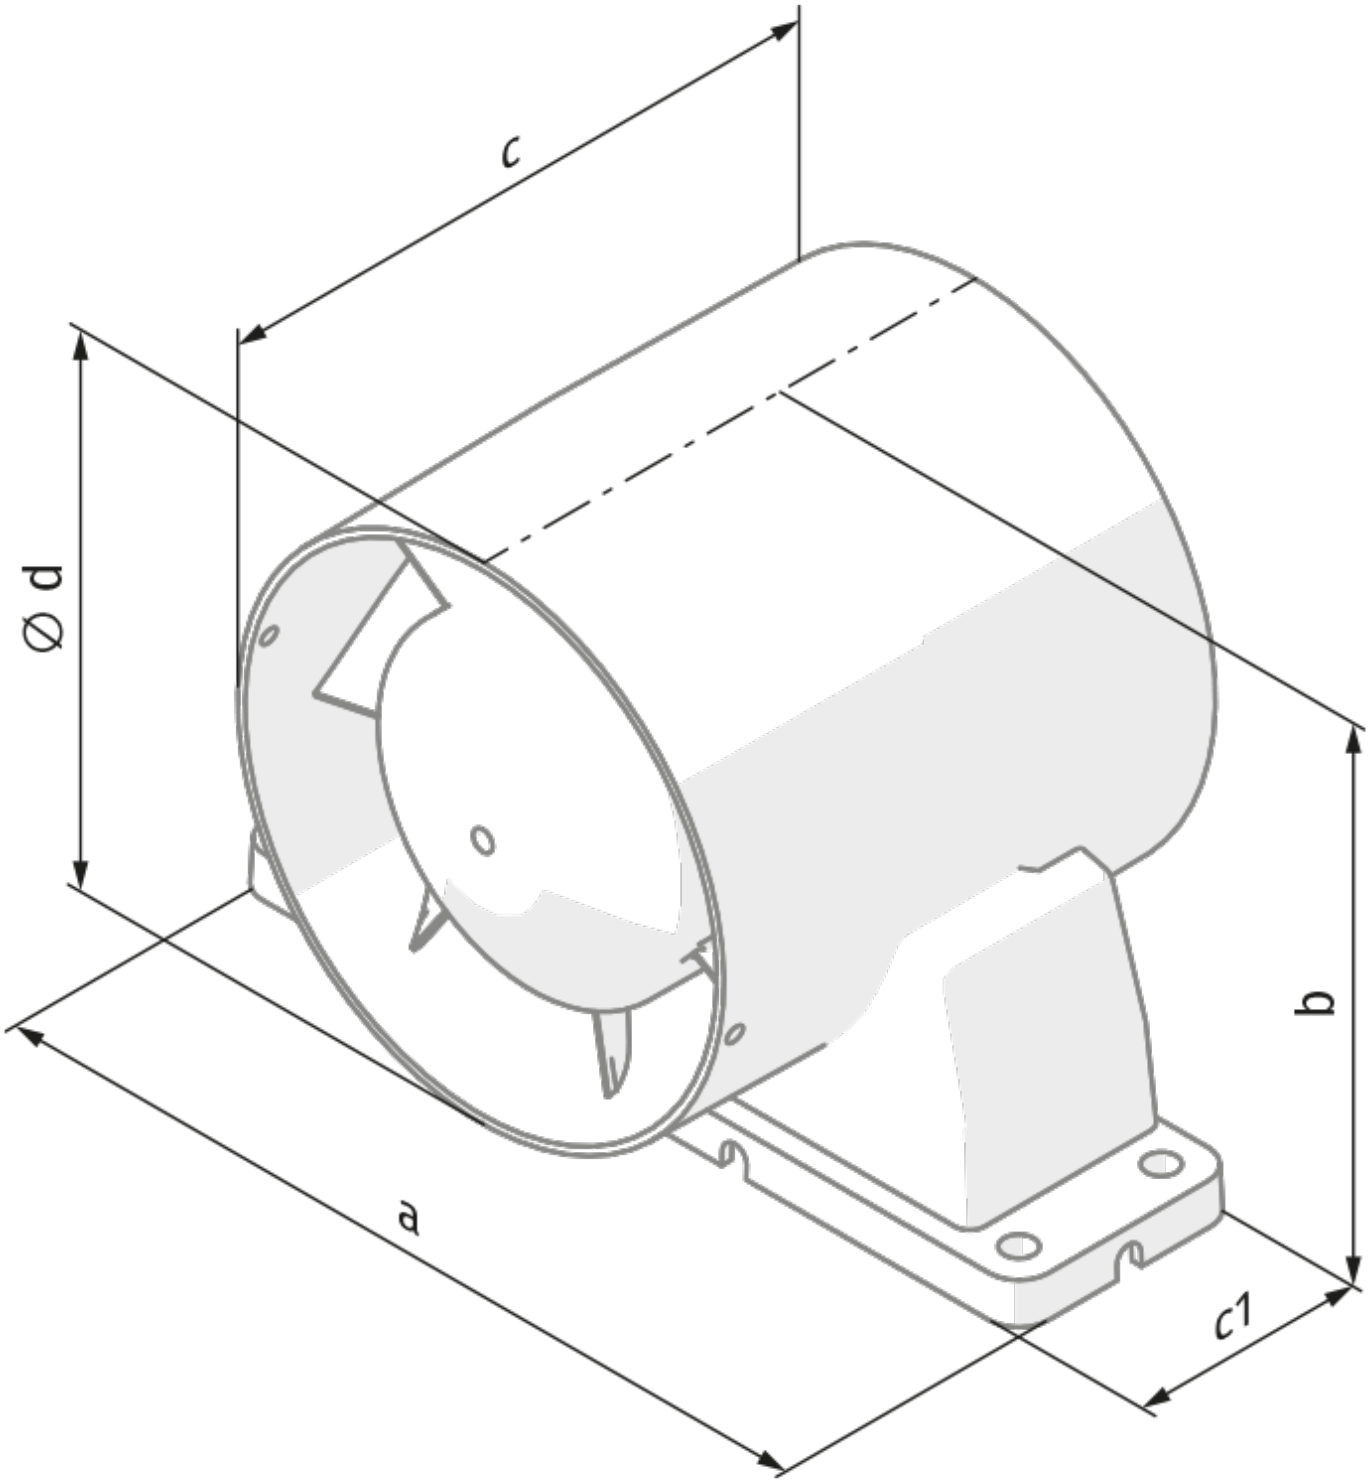

## Ecodesign

| | | | | | | |
|---|---|---|---|---|---|---|
| Trademark | Blauberg | | | | | |
| Model | Tubo 150 | | | | | |
| Specific energy consumption (SEC) (kWh/(m²/a)) | Cold | | Average | | Warm | |
| | -31.2 | B | -14.8 | E | -5.5 | F |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | Single speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m³/h) | 295 | | | | | |
| Electric power input (W) | 29 | | | | | |
| Reference flow rate (m³/s) | 0.07 | | | | | |
| Specific power input (SPI) (W/(m³/h)) | 0.074 | | | | | |
| Control typology | Manual control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU UVU | | | | | |
| Sound power level (dB(A)) | 60 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 92 | | 92 | | 92 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 3355 | | 1715 | | 776 | |