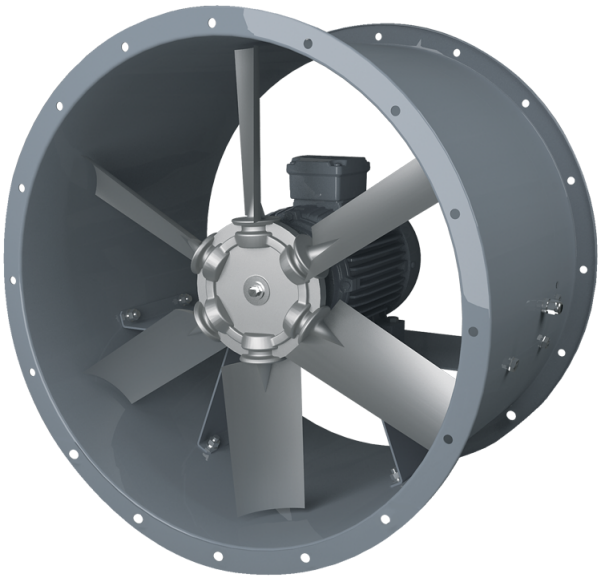


# Axis-P

Medium pressure axial fans

- Impeller type: Axial
- Casing material: Coated steel

| Lineup | Maximum airflow, m³/h | Number of blades, pcs. | Blade setting angle, degrees | Impeller material |
|---|---|---|---|---|
| Axis-P 400-2D/0.55-6/25/AL | 5700 | 6 | 25 | Aluminium |
| Axis-P 400-2D/0.75-6/30/AL | 6900 | 6 | 30 | Aluminium |
| Axis-P 400-2D/1.1-6/35/AL | 8300 | 6 | 35 | Aluminium |
| Axis-P 400-2D/1.5-6/40/AL | 9100 | 6 | 40 | Aluminium |
| Axis-P 400-2D/2.2-6/45/AL | 10200 | 6 | 45 | Aluminium |
| Axis-P 400-2D/2.2-8/45/AL | 10600 | 8 | 45 | Aluminium |
| Axis-P 400-2D/0.55-6/25/PAG | 5700 | 6 | 25 | Fiberglass reinforced polyamide |

| | | | | |
|---|---|---|---|---|
|  Axis-P 400-2D/0.75-6/30/PAG | 6900 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 400-2D/1.1-6/35/PAG | 8300 | 6 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 400-2D/1.5-6/40/PAG | 9100 | 6 | 40 | Fiberglass reinforced polyamide |
|  Axis-P 400-2D/2.2-6/45/PAG | 10200 | 6 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 400-2D/2.2-8/45/PAG | 10600 | 8 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 400-4D/0.12-6/30/AL | 3450 | 6 | 30 | Aluminium |
|  Axis-P 400-4D/0.18-6/35/AL | 4130 | 6 | 35 | Aluminium |
|  Axis-P 400-4D/0.18-6/40/AL | 4540 | 6 | 40 | Aluminium |
|  Axis-P 400-4D/0.25-6/45/AL | 5100 | 6 | 45 | Aluminium |
|  Axis-P 400-4D/0.37-8/45/AL | 5280 | 8 | 45 | Aluminium |
|  Axis-P 400-4D/0.12-6/30/PAG | 3450 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 400-4D/0.18-6/35/PAG | 4130 | 6 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 400-4D/0.18-6/40/PAG | 4540 | 6 | 40 | Fiberglass reinforced polyamide |

| | | | | |
|---|---|---|---|---|
|  Axis-P 400-4D/0.25-6/45/PAG | 5100 | 6 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 400-4D/0.37-8/45/PAG | 5280 | 8 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 450-2D/0.75-6/25/AL | 7500 | 6 | 25 | Aluminium |
|  Axis-P 450-2D/1.1-6/30/AL | 9000 | 6 | 30 | Aluminium |
|  Axis-P 450-2D/1.5-6/35/AL | 11100 | 6 | 35 | Aluminium |
|  Axis-P 450-2D/2.2-6/40/AL | 12400 | 6 | 40 | Aluminium |
|  Axis-P 450-2D/3-8/40/AL | 13000 | 8 | 40 | Aluminium |
|  Axis-P 450-2D/4-8/45/AL | 15000 | 8 | 45 | Aluminium |
|  Axis-P 450-2D/0.75-6/25/PAG | 7500 | 6 | 25 | Fiberglass reinforced polyamide |
|  Axis-P 450-2D/1.1-6/30/PAG | 9000 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 450-2D/1.5-6/35/PAG | 11100 | 6 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 450-2D/2.2-6/40/PAG | 12400 | 6 | 40 | Fiberglass reinforced polyamide |
|  Axis-P 450-2D/3-8/40/PAG | 13000 | 8 | 40 | Fiberglass reinforced polyamide |

| | | | | |
|---|---|---|---|---|
|  Axis-P 450-2D/4-8/45/PAG | 15000 | 8 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 450-4D/0.12-6/25/AL | 3700 | 6 | 25 | Aluminium |
|  Axis-P 450-4D/0.18-6/30/AL | 4500 | 6 | 30 | Aluminium |
|  Axis-P 450-4D/0.25-6/35/AL | 5600 | 6 | 35 | Aluminium |
|  Axis-P 450-4D/0.25-6/40/AL | 6200 | 6 | 40 | Aluminium |
|  Axis-P 450-4D/0.37-6/45/AL | 7100 | 6 | 45 | Aluminium |
|  Axis-P 450-4D/0.55-8/45/AL | 7500 | 8 | 45 | Aluminium |
|  Axis-P 450-4D/0.12-6/25/PAG | 3700 | 6 | 25 | Fiberglass reinforced polyamide |
|  Axis-P 450-4D/0.18-6/30/PAG | 4500 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 450-4D/0.25-6/35/PAG | 5600 | 6 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 450-4D/0.25-6/40/PAG | 6200 | 6 | 40 | Fiberglass reinforced polyamide |
|  Axis-P 450-4D/0.37-6/45/PAG | 7100 | 6 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 450-4D/0.55-8/45/PAG | 7500 | 8 | 45 | Fiberglass reinforced polyamide |

| | | | | |
|---|---|---|---|---|
|  Axis-P 500-2D/1.1-6/25/AL | 9300 | 6 | 25 | Aluminium |
|  Axis-P 500-2D/1.5-6/30/AL | 11600 | 6 | 30 | Aluminium |
|  Axis-P 500-2D/2.2-6/35/AL | 14200 | 6 | 35 | Aluminium |
|  Axis-P 500-2D/3-8/35/AL | 15200 | 8 | 35 | Aluminium |
|  Axis-P 500-2D/4-8/40/AL | 17200 | 8 | 40 | Aluminium |
|  Axis-P 500-2D/5.5-8/45/AL | 19600 | 8 | 45 | Aluminium |
|  Axis-P 500-2D/1.1-6/25/PAG | 9300 | 6 | 25 | Fiberglass reinforced polyamide |
|  Axis-P 500-2D/1.5-6/30/PAG | 11600 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 500-2D/2.2-6/35/PAG | 14200 | 6 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 500-2D/3-8/35/PAG | 15200 | 8 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 500-2D/4-8/40/PAG | 17200 | 8 | 40 | Fiberglass reinforced polyamide |
|  Axis-P 500-2D/5.5-8/45/PAG | 19600 | 8 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 500-4D/0.18-6/25/AL | 4600 | 6 | 25 | Aluminium |

| | | | | |
|---|---|---|---|---|
|  Axis-P 500-4D/0.25-6/30/AL | 5800 | 6 | 30 | Aluminium |
|  Axis-P 500-4D/0.37-6/35/AL | 7100 | 6 | 35 | Aluminium |
|  Axis-P 500-4D/0.37-6/40/AL | 7900 | 6 | 40 | Aluminium |
|  Axis-P 500-4D/0.55-6/45/AL | 9200 | 6 | 45 | Aluminium |
|  Axis-P 500-4D/0.75-8/45/AL | 9800 | 8 | 45 | Aluminium |
|  Axis-P 500-4D/0.18-6/25/PAG | 4600 | 6 | 25 | Fiberglass reinforced polyamide |
|  Axis-P 500-4D/0.25-6/30/PAG | 5800 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 500-4D/0.37-6/35/PAG | 7100 | 6 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 500-4D/0.37-6/40/PAG | 7900 | 6 | 40 | Fiberglass reinforced polyamide |
|  Axis-P 500-4D/0.55-6/45/PAG | 9200 | 6 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 500-4D/0.75-8/45/PAG | 9800 | 8 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 560-2D/1.5-6/25/AL | 11200 | 6 | 25 | Aluminium |
|  Axis-P 560-2D/2.2-6/30/AL | 14100 | 6 | 30 | Aluminium |

| | | | | |
|---|---|---|---|---|
|  Axis-P 560-2D/3-8/30/AL | 15500 | 8 | 30 | Aluminium |
|  Axis-P 560-2D/4-8/35/AL | 19700 | 8 | 35 | Aluminium |
|  Axis-P 560-2D/5.5-8/40/AL | 22100 | 8 | 40 | Aluminium |
|  Axis-P 560-2D/7.5-8/45/AL | 25700 | 8 | 45 | Aluminium |
|  Axis-P 560-2D/1.5-6/25/PAG | 11200 | 6 | 25 | Fiberglass reinforced polyamide |
|  Axis-P 560-2D/2.2-6/30/PAG | 14100 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 560-2D/3-8/30/PAG | 15500 | 8 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 560-2D/4-8/35/PAG | 19700 | 8 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 560-2D/5.5-8/40/PAG | 22100 | 8 | 40 | Fiberglass reinforced polyamide |
|  Axis-P 560-2D/7.5-8/45/PAG | 25700 | 8 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 560-4D/0.25-6/25/AL | 5600 | 6 | 25 | Aluminium |
|  Axis-P 560-4D/0.37-6/30/AL | 7000 | 6 | 30 | Aluminium |
|  Axis-P 560-4D/0.55-6/35/AL | 8800 | 6 | 35 | Aluminium |

| | | | | |
|---|---|---|---|---|
|  Axis-P 560-4D/0.55-6/40/AL | 10100 | 6 | 40 | Aluminium |
|  Axis-P 560-4D/0.75-6/45/AL | 11700 | 6 | 45 | Aluminium |
|  Axis-P 560-4D/1.1-8/45/AL | 12800 | 8 | 45 | Aluminium |
|  Axis-P 560-4D/0.25-6/25/PAG | 5600 | 6 | 25 | Fiberglass reinforced polyamide |
|  Axis-P 560-4D/0.37-6/30/PAG | 7000 | 6 | 30 | Fiberglass reinforced polyamide |
|  Axis-P 560-4D/0.55-6/35/PAG | 8800 | 6 | 35 | Fiberglass reinforced polyamide |
|  Axis-P 560-4D/0.55-6/40/PAG | 10100 | 6 | 40 | Fiberglass reinforced polyamide |
|  Axis-P 560-4D/0.75-6/45/PAG | 11700 | 6 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 560-4D/1.1-8/45/PAG | 12800 | 8 | 45 | Fiberglass reinforced polyamide |
|  Axis-P 630-2D/3-8/25/AL | 15000 | 8 | 25 | Aluminium |
|  Axis-P 630-2D/4-8/30/AL | 19000 | 8 | 30 | Aluminium |
|  Axis-P 630-2D/5.5-8/35/AL | 24300 | 8 | 35 | Aluminium |
|  Axis-P 630-2D/7.5-8/40/AL | 27800 | 8 | 40 | Aluminium |

| | | | | |
|---|---|---|---|---|
|  Axis-P 630-2D/9.2-6/30/AL | 28800 | 6 | 30 | Aluminium |
|  Axis-P 630-2D/11-6/32.5/AL | 31100 | 6 | 32.5 | Aluminium |
|  Axis-P 630-2D/11-6/35/AL | 33400 | 6 | 35 | Aluminium |
|  Axis-P 630-2D/15-6/37.5/AL | 35400 | 6 | 37.5 | Aluminium |