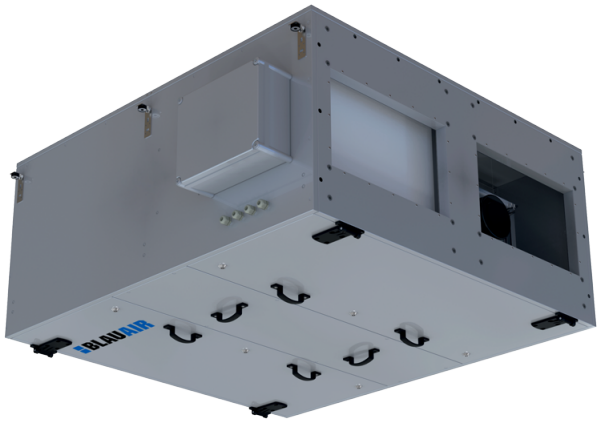






BlauAIR RP

Premium commercial suspended air handling units with a rotary heat exchanger

• Heat exchanger type: Rotary, condensation or enthalpy
• Heat exchanger material: Aluminium/aluminium with hygroscopic coating
• Sound-insulated casing
• BMS protocol: ModBus, Bacnet
• Casing material: Aluzinc steel

Lineup	Casing performance	Phases	Rated power supply fan, W	Rated power extract fan, W	Maximum airflow, m³/h	Reheater	Preheater	BMS protocol
 BLS02 RP 1500	50 mm T2/TB2	1	700	700	1850	Optional	Optional	ModBus Bacnet
 BLS02 RP 2500	50 mm T2/TB2	3	1200	1200	2850	Optional	Optional	ModBus Bacnet
 BL02 RP 1500	40 mm T3/TB4	1	700	700	1850	Optional	Optional	ModBus Bacnet
 BL02 RP 2500	40 mm T3/TB4	3	1200	1200	2850	Optional	Optional	ModBus Bacnet